



BEAMZ
MADE
EAZY


153.304 V1

BS1000 STROBE

QUICK START GUIDE

CONTROL MENU

MENU			DESCRIPTION
DMX ADDR	A000-Axxx		DMX address setting
CHANNEL	1 / 2 / 3 / 6 / D4 / S4 / 10		Select DMX channel mode
MANUAL	BLOCK 1	000-255	Manual setting of DMX values for each DMX Channel
	BLOCK 2	000-255	
	BLOCK 3	000-255	
	BLOCK 4	000-255	
	Strobe	000-255	
AUTO	Auto 00	Speed <000> to <255>	Select auto program and adjust auto run speed
	Auto 01		
	Auto 02		
		
	Auto 012		
EFFECT ON AUTO	Dimmer	000-255	Adjust dimmer level and switch on strobe at different speed for auto run
	Strobe	000-255	
MAS MODE	Yes		Select master or slave mode
	No		Switch off master / slave function
BACK LIGHT	On		Display background light always stays on
	60s		Display background light turns off after 60s
	120s		Display background light turns off after 120s
	300s		Display background light turns off after 300s
TEMP	Temp	xx°C	Display current temperature on LED panel
INFO	Test 1		Test mode without flash
	Test 2		Test mode with flash
	Recover	Yes / No	Restore factory settings
	Version		Display current version

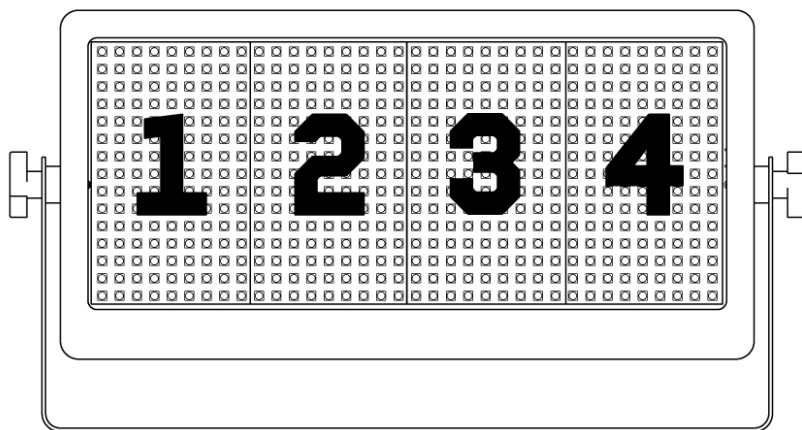

DMX CHANNELS

1 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	Mode	000-005	No function
		006-250	Flash
		251-254	Blinder
		255	Flash

2 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	Dimmer	000-009	No function
		010-255	Dimmer, 0-100%
2	Flash rate	000-005	No function
		006-255	Beam flash rate, from slow to fast

3 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	Dimmer	000-009	No function
		010-255	Dimmer, 0-100%
2	Flash intensity	000-005	No function
		006-255	Beam flash intensity, from slow to fast
3	Flash rate	000-004	No function
		005-255	Beam flash rate, from slow to fast

6 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	Dimmer	000-009	No function
		010-255	Dimmer, 0-100%
2	Flash intensity	000-005	No function
		006-255	Beam flash intensity, from slow to fast
3	Strobe	000-004	No function
		005-255	Strobe
4	Flash rate	000-005	No function
		006-255	Beam flash rate, from slow to fast
5	Effect	000-005	No function
		006-255	Beam special effect
6	Speed	000-005	No function
		006-255	Speed

S4 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	Section 1	000-255	Beam flash rate, from slow to fast
2	Section 2	000-255	Beam flash rate, from slow to fast
3	Section 3	000-255	Beam flash rate, from slow to fast
4	Section 4	000-255	Beam flash rate, from slow to fast

D4 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	Section 1	000-255	Dimmer, 0-100%
2	Section 2	000-255	Dimmer, 0-100%
3	Section 3	000-255	Dimmer, 0-100%
4	Section 4	000-255	Dimmer, 0-100%



BEAMZ

YOUR FUTURE
YOUR SKILLS
YOUR PLATFORM
YOUR PARTY
YOUR EVENT



is a leading developer of lighting products, including intelligent DMX moving heads, wireless battery operated DMX effects, static washes, sound-activated club effects, strobes & blacklights, LED lighting, fog and special effects machines, lasers and indoor and outdoor architectural lighting, as well as lighting controllers and protective bags.

