





AMP TOP BOX

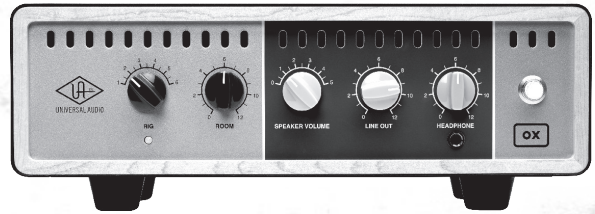

Quick Start Guide

Set Up

- Important:** Power off your tube amp before connecting or disconnecting speaker cables
- Connect OX's included power supply
- Set OX's rear panel IMPEDANCE knob to match your amp's output impedance
- Connect a 1/4" **speaker cable** between your amp's speaker output and OX's **red FROM AMPLIFIER** input on the rear panel. (See reverse side for OX output connections.)

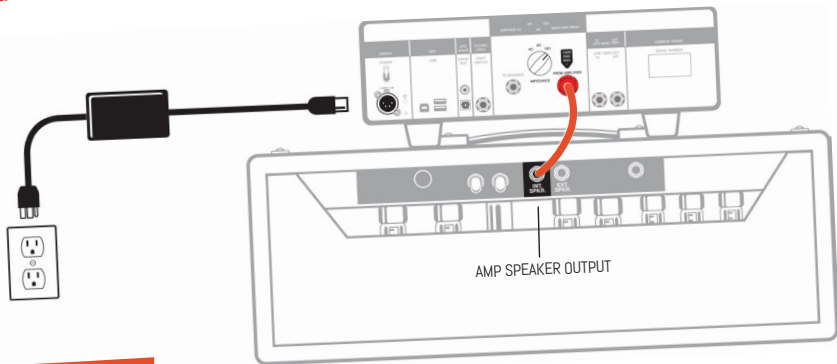

⚡ CAUTION! TO AVOID GEAR MELTDOWN:

- **DON'T** operate any tube amp without an output load (such as OX or a speaker)
- DON'T use OX with amps exceeding 150 Watts output
- DON'T expose OX to moisture or liquids (no frosty beverages on top!)
- DON'T cover OX's air vents

Know Your Cables

Shielded Cable

- One larger center wire (2 center wires if balanced TRS)
- Shield around center wire(s)

Speaker Cable

- Two wires, same size
- No shield around wires

Use only 1/4" mono unshielded speaker cables for OX's high-power FROM AMPLIFIER and TO SPEAKER connections


Start Up

- Set OX's SPEAKER VOLUME, LINE OUT, and HEADPHONE knobs to minimum position
- Power on OX with the rear panel POWER switch
- Power on your guitar amp
- Adjust your amp controls to make it sound sweet

Crank Up

RIG
Choose from six complete guitar cabinet/mic/room/effect setups. RIG settings are easily customized with OX software.

SPEAKER VOLUME
Adjusts the volume of the guitar speaker cabinet connected to OX. At position 0, the speaker is OFF for silent operation. **Note:** RIG and ROOM knobs don't affect the speaker output.

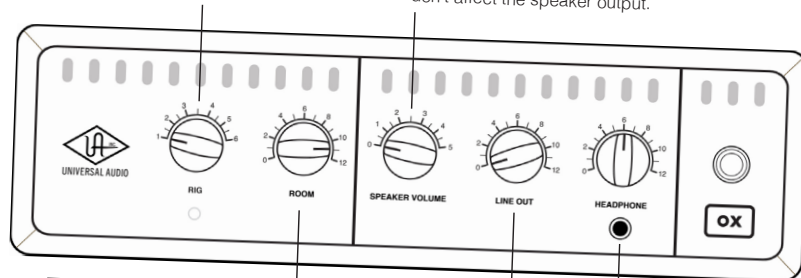

ROOM
Instant access to mic'd studio ambience and air.


LINE OUT
Adjusts the level at OX's stereo LINE/MON outputs.

HEADPHONE
Adjusts the volume of stereo headphones connected here.

Learn more



AMP TOP BOX

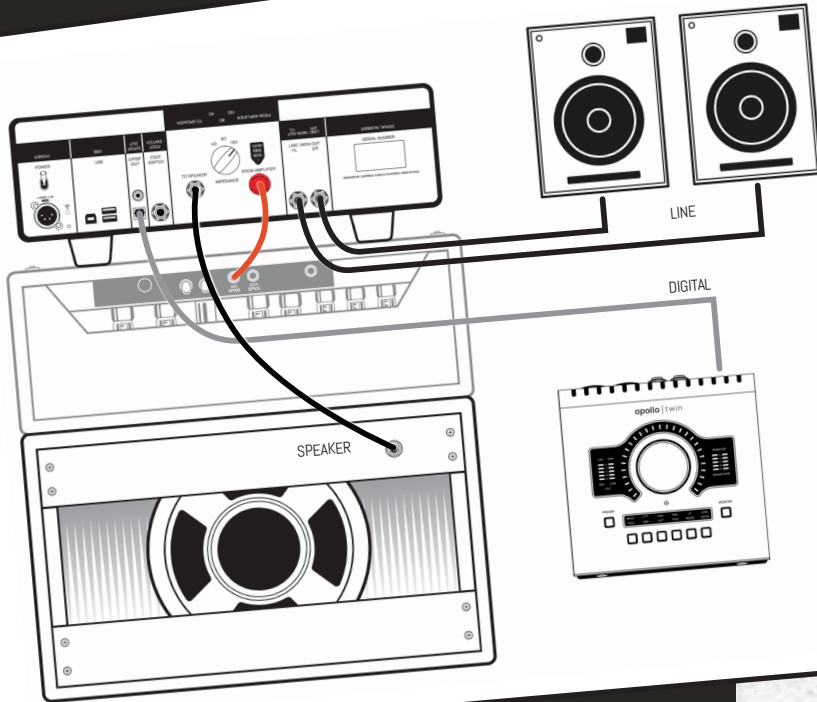

Output Connections

Guitar Speaker Cabinet

- Connect a 1/4" **speaker cable** between OX's rear panel TO SPEAKER jack and guitar speaker cabinet
- The connected speaker should match OX's rear panel IMPEDANCE knob setting

Line / Monitor Outputs

- Connect OX's rear panel LINE / MON OUT jacks to the line-level inputs of a stereo monitor system or other audio gear
- Use shielded 1/4" balanced TRS or unbalanced TS line / instrument cables (not speaker cables)



Headphones

- Connect stereo headphones to the 1/4" jack on OX's front panel

S/PDIF Digital Outputs

- Connect OX's rear panel S/PDIF digital output(s) to the digital input(s) of a computer audio interface or other digital audio gear
- The **Optical TOSLINK** and **coaxial RCA** outputs can be used at the same time
- Digital output levels can be adjusted using OX software

Tweak and Save Your Rigs with FREE OX Software

OX includes **free software** for Mac/Windows and iPad. With OX software, RIG presets can be wirelessly edited and stored with OX's built-in Wi-Fi network.

Each RIG preset contains a complete album-quality guitar tone — including emulated speaker cabinets, speaker mics, ambient room mics, and up to four simultaneous effects.

Full software documentation is available in the OX manual at help.uaudio.com.



GET OX SOFTWARE:

- **Mac/Windows app:** From your computer, visit www.uaudio.com/ox/app
- **iPad:** From your iPad, visit the Apple iOS App Store

COMPLETE OX INFORMATION:

- **Product details:** www.uaudio.com/ox
- **Docs and tech support:** help.uaudio.com



UNIVERSAL AUDIO