



BEAMZ
MADE
EAZY

153.277 V1

FLOOD36UV

QUICK START GUIDE

UNPACKING INSTRUCTION

CAUTION! Immediately upon receiving the product, carefully unpack the carton, check the contents to ensure that all parts are present, and have been received in good condition. Notify the shipper immediately and retain packing material for inspection if any parts appear damaged from shipping or the package itself shows signs of mishandling. Save the package and all packing materials. In the event that the product must be returned to the factory, it is important that the product be returned in the original factory box and packing.

If the unit has been exposed to drastic temperature fluctuation (e.g. after transportation), do not switch it on immediately. The arising condensation water might damage your unit. Leave the unit switched off until it has reached room temperature.

POWERSUPPLY


On the label on the backside of the unit is indicated on this type of power supply must be connected. Check that the mains voltage corresponds to this, all other voltages than specified, the light effect can be irreparably damaged. The product must also be directly connected to the mains and may be used. No dimmer or adjustable power supply.

WARNING! Always connect the unit to a protected circuit (circuit breaker or fuse). Make sure the unit has an appropriate electrical ground to avoid the risk of electrocution or fire.

RIGGING


The unit may be set up on a stable and even surface. By means of the fixing facilities of the baseplate, the unit can also be mounted upside down to a truss, see below picture. For fixing, certified clamps with correct safe working load are required. According to the figure, the quick lock bolts of the omega brackets are placed into the openings provided in the base plate and turned clockwise until they lock (to the stop). The mounting place must be of sufficient stability and be able to support a weight of 10 times of the unit's weight. Secure the unit with a safety cable so that it cannot fall down.

When carrying out any installation, always comply European and national guidelines concerning rigging, truss and all other safety issues. Always let the installation checked out by an authorized dealer!

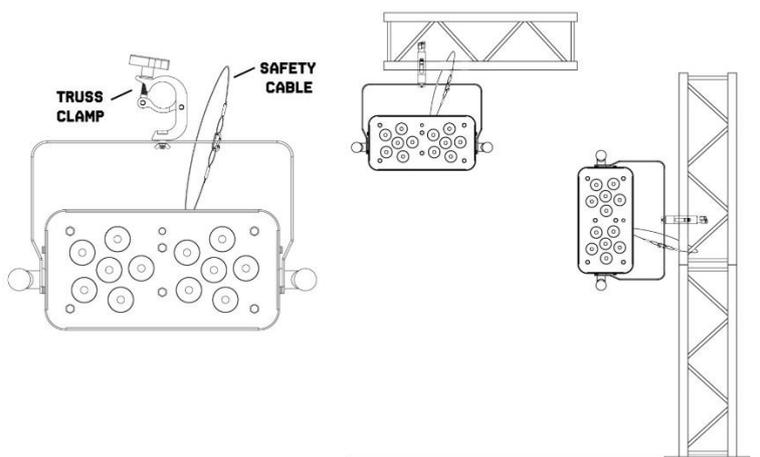


DMX512 CONTROL

If you are using a standard DMX controller, you can connect the DMX output of the controller directly to the DMX input of the first unit in a DMX chain. Always connect the output of one unit with the input of the next unit until all units are connected.

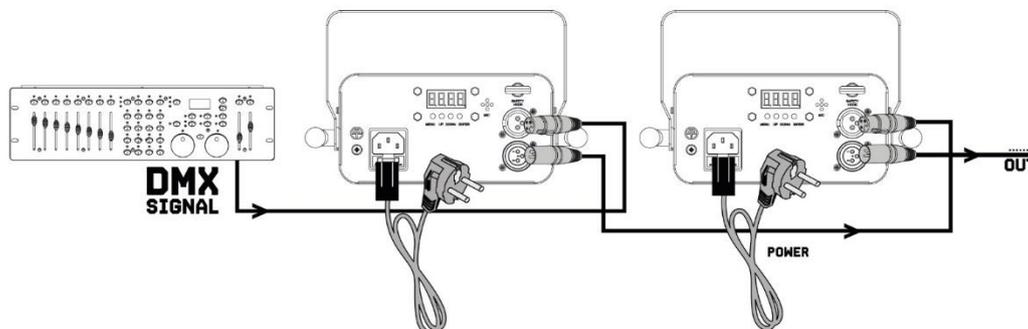

CAUTION! At the last unit, you must close the DMX line with a terminating resistor. Take an XLR connector and solder a 120 Ohm resistor between signal (-) and signal (+) and connect it to the DMX output of the last unit in the line.

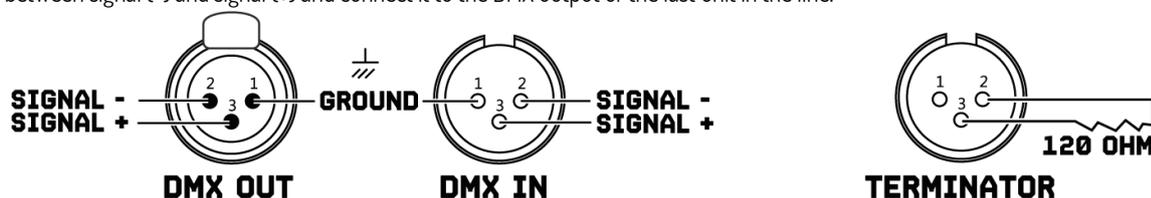

CONTROL MENU

MENU		DESCRIPTION
DMX ADDR	A000-Axxx	DMX address setting
CHND	4 Ch 8Ch	DMX Channel mode
CLXX	CL01-CL09	Constantly bright area selection. CL09 is constantly bright.
CCXX	CC01-CC99	Jump mode, the value is larger, the speed is faster.
EEXX	EE01-EE99	Pulse mode, the value is larger, the speed is faster.
FFXX	FF01-FF99	Fading mode, the value is larger, the speed is faster.
STXX	ST01-ST99	Strobe change, the value is larger, the speed is faster.
SOUX	Sou1 Sou2 Sou3 Sou4	Sound control jump mode Sound control pulse mode Sound control strobe mode Full effect control mode
RXXX	R000-R255	Adjust brightness 1st segment, 0-100%
GXXX	G000-G255	Adjust brightness 2nd segment, 0-100%
BXXX	B000-B255	Adjust brightness 3rd segment, 0-100%
UXXX	U000-U255	Adjust brightness 4th segment, 0-100%

DMX CHANNELS

4 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	Dimmer	000-255	1 st segment, 0-100%
2		000-255	2 nd segment, 0-100%
3		000-255	3 rd segment, 0-100%
4		000-255	4 th segment, 0-100%

8 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	Master dimmer	000-255	Dimmer, 0-100%
2	Sections	000-255	1 st segment, 0-100%
3		000-255	2 nd segment, 0-100%
4		000-255	3 rd segment, 0-100%
5		000-255	4 th segment, 0-100%
6	Strobe	000-255	Strobe, from slow to fast
7	Macro	000-255	Macro
8	Speed	000-255	Speed for channel 7



BEAMZ

YOUR FUTURE
YOUR SKILLS
YOUR PLATFORM
YOUR PARTY
YOUR EVENT



is a leading developer of lighting products, including intelligent DMX moving heads, wireless battery operated DMX effects, static washes, sound-activated club effects, strobes & blacklights, LED lighting, fog and special effects machines, lasers and indoor and outdoor architectural lighting, as well as lighting controllers and protective bags.

