



**BEAMZ**  
**MADE**  
**EAZY**


153.300 V1

**BS1500 STROBE**

**QUICK START GUIDE**

# CONTROL MENU

MENU			DESCRIPTION
DMX ADDR	A000-Axxx		DMX address setting
CHANNEL	4 / 5 / 7 / 13 / 15 / 31		Select DMX channel mode
DMX MONITOR	Channel 4 mode		Manual setting of DMX values for each DMX Channel
	Channel 5 mode		
	Channel 7 mode		
	Channel 13 mode		
	Channel 15 mode		
	Channel 31 mode		
AUTO	Auto 00	Speed <000> to <255>	Select auto program and adjust auto run speed
	Auto 01		
	Auto 02		
	....		
	Auto 036		
EFFECT ON AUTO	Dimmer	000-255	Adjust dimmer level and switch on strobe at different speed for auto run
	Strobe	000-255	
MANUAL	White	000-255	Manual setting
	Blue	000-255	
	Green	000-255	
	Red	000-255	
	Strobe	000-255	
	Dimmer	000-255	
MAS MODE	Yes		Select master or slave mode
	No		Switch off master / slave function
BACK LIGHT	0n		Display background light always stays on
	60s		Display background light turns off after 60s
	120s		Display background light turns off after 120s
	300s		Display background light turns off after 300s
TEMP	Temp 1	xx°C	Display current temperature on LED panel
	Temp 2	xx°C	Display current temperature on
INFO	Test 1		Test mode without flash
	Test 2		Test mode with flash
	Reset	Yes / No	Restore factory settings
	Version		Display current version
DIMMER CURVE	<Curve 0>		Select dimming curve
	<Curve 1>		
	<Curve 2>		
	<Curve 3>		
FADE TIME	<Speed 0>		Select fade time
	<Speed 1>		
	.....		
	<Speed 7>		

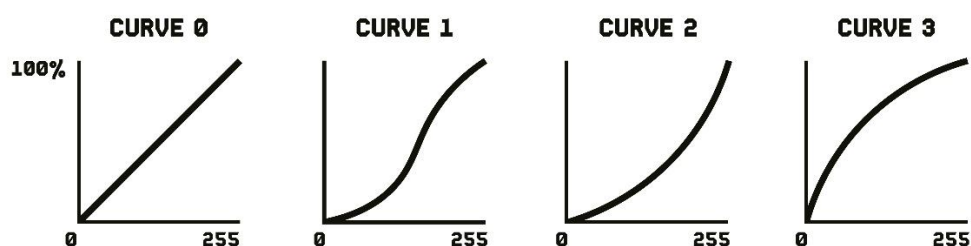

# DMX CHANNELS

## 4 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	Colour	000-255	No function
		001-255	Red, dimmer 0-100%
2		000-255	No function
		001-255	Green, dimmer 0-100%
3		000-255	No function
		001-255	Blue, dimmer 0-100%
4		000-255	No function
		001-255	White, dimmer 0-100%

## 5 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	All LED	000-005	No function
		006-250	Strobe speed, from slow to fast, RGBW full on
		251-254	RGBW full on
		255	Special strobe effect, RGBW full on
2	Red	000-005	No function
		006-250	Beam flash intensity, from slow to fast, full on
		251-255	Red full on
3	Green	000-005	No function
		006-250	Beam flash intensity, from slow to fast, full on
		251-255	Green full on
4	Blue	000-005	No function
		006-250	Beam flash intensity, from slow to fast, full on
		251-255	Blue full on
5	White	000-005	No function
		006-250	Beam flash intensity, from slow to fast, full on
		251-255	White full on

## 7 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	All LED	000	No function
		001-255	Dimmer 0-100%, RGBW
2	Flash intensity	000	No function
		001-255	Beam flash intensity
3	Flash rate	000	No function
		001-255	Beam flash rate, from slow to fast
4	Flash random	000	No function
		001-255	Random strobe
5	Special effect	000-009	No function
		010-255	Beam special effect 1
6	Special effect flash rate	000	No function
		001-255	Beam flash rate effect 1, from slow to fast
7	Macro	000	No function
		001-255	Macro



# BEAMZ

**YOUR FUTURE  
YOUR SKILLS  
YOUR PLATFORM  
YOUR PARTY  
YOUR EVENT**



offers a wide range of high performance lighting equipment and related accessories for the rental, entertainment and architectural lighting markets. BeamZ Pro stands for performance, innovation and value pricing!

