



BEAMZ
MADE
EAZY


153.302 V1

BS1200 STROBE

QUICK START GUIDE

CONTROL MENU

MENU			DESCRIPTION
DMX ADDR	A000-Axxx		DMX address setting
CHANNEL	4 / 11 / 13 / 31		Select DMX channel mode
DMX MONITOR	Channel 4 mode		Manual setting of DMX values for each DMX Channel
	Channel 11 mode		
	Channel 13 mode		
	Channel 31 mode		
AUTO	Auto 00	Speed <000> to <255>	Select auto program and adjust auto run speed
	Auto 01		
	Auto 02		
		
	Auto 036		
EFFECT ON AUTO	Dimmer	000-255	Adjust dimmer level and switch on strobe at different speed for auto run
	Strobe	000-255	
MAS MODE	Yes		Select master or slave mode
	No		Switch off master / slave function
MANUAL	Dimmer	000-255	Manual setting
	Strobe	000-255	
	Blue	000-255	
	Green	000-255	
	Red	000-255	
BACK LIGHT	on		Display background light always stays on
	60s		Display background light turns off after 60s
	120s		Display background light turns off after 120s
	300s		Display background light turns off after 300s
TEMP	Temp 1	xx°C	Display current temperature on LED panel
	Temp 2	xx°C	Display current temperature on
INFO	Test1		Test mode without flash
	Test2		Test mode with flash
	Version	VV03.11	Display current version
	Reset	Yes	Restore factory settings
	No		
DIMMER CURVE	<Curve 0>		Select dimming curve
	<Curve 1>		
	<Curve 2>		
	<Curve 3>		
FADE TIME	<Speed 0>	000-255	Select fade time
	<Speed 1>		
		
	<Speed 7>		

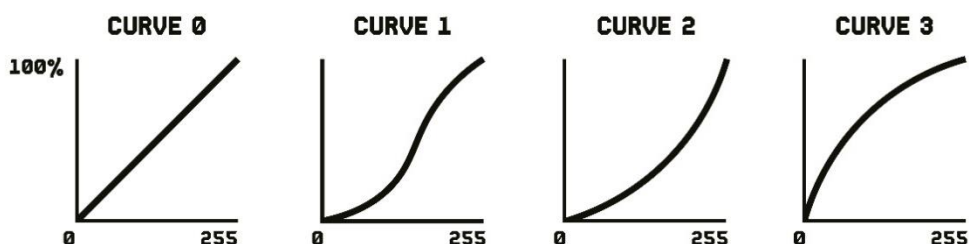

DMX CHANNELS

4 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	All LED	000-005	No function
		006-255	Mixed colour white light flash
2	Red	000-005	No function
		006-250	Beam flash intensity, from slow to fast, full on
		251-255	Red full on
3	Green	000-005	No function
		006-250	Beam flash intensity, from slow to fast, full on
		251-255	Green full on
4	Blue	000-005	No function
		006-250	Beam flash intensity, from slow to fast, full on
		251-255	Blue full on

11 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	Master dimmer	000-255	Dimmer 0-100%
2	Colour	000-255	Red 0-100%
3		000-255	Green 0-100%
4		000-255	Blue 0-100%
5		Flash intensity	000-255
6	Special effect	000-255	Beam special effect
7		000-255	Beam flash rate effect , from slow to fast
8	Macro	000-255	Mixed colours
9	Background	000-255	Red background colour
10		000-255	Green background colour
11		000-255	Blue background colour

13 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	Master dimmer	000-255	Dimmer 0-100%
2	Colour	000-255	Red 0-100%
3		000-255	Green 0-100%
4		000-255	Blue 0-100%
5		Blind	000-255
6	Flash intensity	000-255	Beam flash intensity, from minimum to maximum intensity
7	Special effect	000-255	Flash effects CH6
8		000-255	Segment effect
9		000-255	Speed segment effect CH8
10		000-255	Auto colour change
		129-160	Colour fade
	161-192	Auto colour loop	
11	193-224	Auto colour wave	
	225-255	Auto colour loop from slow to fast	
	000-255	Background Blue 0-100%	
12		000-255	Background Red 0-100%
13		000-255	Background Green 0-100%



BEAMZ

**YOUR FUTURE
YOUR SKILLS
YOUR PLATFORM
YOUR PARTY
YOUR EVENT**



is a leading developer of lighting products, including intelligent DMX moving heads, wireless battery operated DMX effects, static washes, sound-activated club effects, strobes & blacklights, LED lighting, fog and special effects machines, lasers and indoor and outdoor architectural lighting, as well as lighting controllers and protective bags.

