

DATA SHEET

SONTRONICS STC-2


Technical specifications

Microphone type	Large-diaphragm condenser
Polar pattern	Cardioid
Frequency response	20Hz to 20kHz
Pad	0dB, -10dB
Filter	Linear, 75Hz
Sensitivity (0dB = 1V/Pa @ 1kHz)	20mV/Pa -34dB ±2dB
Impedance	≤200 Ohms
Max. SPL (for 0.5% THD @ 1kHz)	125dB
Equivalent noise level	18dB (A-weighted)
Connector	3-pin XLR
Power	Phantom power 48V required
What's included	STC-2 microphone, shockmount, popshield, XLR cable, zip-up pouch

Other information

Product weight	621g (1,053g with shockmount)
Packaged weight	2,254g
Product dimensions	194 x 53 x 53mm
Packaged dimensions	430 x 210 x 120mm
Date introduced	Mic: January 2005; Pack: August 2021
EAN-13 number	Mic (black): 5060173280055 Mic (silver): 5060173280048 Pack (black): 5060173280789 Pack (silver): 5060173280796

Frequency response graph

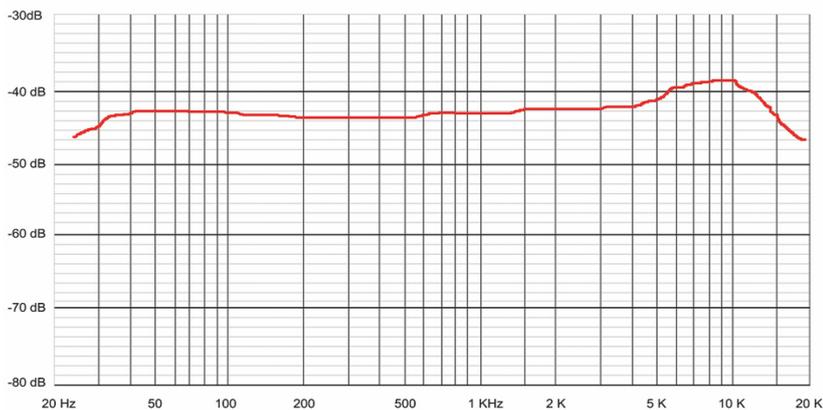

All information correct at time of writing. E&OE. For more information and advice please contact info@sontronics.com