




## PURETAPECOB528-COLD

**SKU:** H11252

Cool white 6500 K COB led tape  
5 meter roll - IP20 - 528 LEDs/meter

The COB tape with its 528 LEDs per metre provides a continuous light without a dotted line effect.  
For a very intense and continuous line of light.

**Color temperature :**

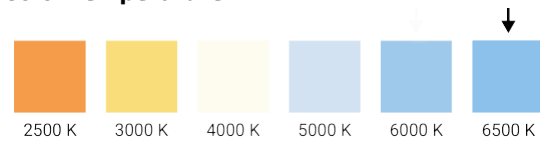

**Categories:** [Tapes](#), [Cold white tapes](#)

## ADDITIONAL INFORMATION

### General characteristics:

- Monochrome ribbon 528 LEDs/m (2640 LEDs for 5m)
- COB LEDs
- Colour temperature: 6500 K (cool white)
- Brightness: 1619 lumens/m
- CRI : 84
- Power requirement: 15 W/m (75 W for 5 m)
- Required voltage: 24 V (+ and -)
- Variable current: With compatible controller only
- IP20: Not resistant to water splashes

### Dimensions:

- Length: 5 m roll
- Thickness: 2 mm
- Width: 10 mm
- Can be cut every 45 mm

### Accessories :

- 2-wire input cable (+ and -) pre-assembled
- 2-wire output cable (+ and -) pre-assembled
- Full length 3M self-adhesive tape



## ADDITIONAL INFORMATION

<b>Input voltage</b>	24 V
<b>Number of LEDs/m</b>	528 LEDs
<b>On-mode power</b>	15 W/m
<b>Efficacité totale (lm/W)</b>	100
<b>Protection class</b>	IP20
<b>LED type</b>	COB
<b>Luminous flux (lm/m)</b>	1619
<b>Energy efficiency class</b>	F
<b>Colour temperature</b>	6500 K
<b>CRI</b>	84
<b>CRI (Minimum)</b>	80
<b>CRI (Maximum)</b>	85
<b>CRI - R9</b>	9
<b>Chromaticity coordinate (x)</b>	0.3094
<b>Chromaticity coordinate (y)</b>	0.3347
<b>Lighting technology used</b>	LED
<b>Non-directional or directional</b>	Non-directional
<b>Angle de faisceau (°)</b>	120°
<b>Mains or non-mains</b>	Non-mains
<b>Connected light source (CLS)</b>	No
<b>Colour-tunable</b>	No
<b>Standby power</b>	
<b>Height (mm)</b>	2
<b>Width (mm)</b>	10
<b>Split length</b>	45 mm