



## ShowBox

### Battery Powered All-In-One Performance Rig with Breakaway Mix Control

Set up in seconds with Mackie ShowBox, the battery-powered all-in-one performance rig that makes it easy to get great live sound anywhere.

ShowBox offers all the audio inputs for solo gigs and small bands, replacing instrument amps and PA speakers and adding effects you can tweak from your mic stand with the breakaway controller.

You can even take your performance online with a USB-C interface for streaming and recording, while playing over backing tracks via Bluetooth®.

With essential performance features and plenty more to discover, Mackie ShowBox lets you carry your whole rig in one trip from the car.

### FEATURES:

- Breakaway Mix Control
- Inputs for Mics, Guitars, Keys and More
- 6 FX Engines (2 FX per channel)
- Stream/Record via USB-C and MicroSD
- Voicing Modes: Amp/PA, Indoor/Outdoor
- Built-in Looper and Tuner
- Bluetooth® Streaming
- Passthrough USB Charging (for mobile devices)
- Up to 12 Hours of Playtime with Included Battery

### APPLICATIONS:

Singer-songwriters / buskers, full bands, announcement PA, karaoke, clubs / cafés, houses of worship, schools, small restaurants, outdoor events / barbeques, banquet halls, conference rooms, boardrooms, and many, many more.



## SHOWBOX SPECIFICATIONS

### Acoustic Performance

Frequency Range (-10 dB)	48 Hz – 20 kHz
Frequency Range (-3 dB)	55 Hz – 20 kHz
Horizontal Coverage	90°
Vertical Coverage	60°
Maximum SPL Peak	122 dB
Monitor Angle	45°

### Transducers

Low Frequency	8.0" / 203 mm woofer with ferrite
High Frequency	1.0" / 25 mm titanium high frequency driver

### Power Amplifiers

System Power Amplification	
Rated Power	400 watts peak
Low Frequency Power Amplifier	
Rated Power	350 watts peak
Rated THD	<1%
Cooling Design	Convection Class D
High Frequency Power Amplifier	
Rated Power	50 watts peak
Rated THD	<1%
Cooling Design	Convection Class D

### Input / Output

Input Type	2x Female XLR, 4x 1/4" balanced jacks, 1/8" Aux jack, Bluetooth, USB-C
Mic Impedance [Channels 1 + 3]	4 kΩ balanced
Instrument Impedance [Channels 2 + 4]	1 MΩ unbalanced
Line Input [Channel 5/6]	10 kΩ balanced/unbalanced
Output Type	Male XLR Balanced [Mix Out], 1/4" Stereo Headphones
Mix Out Impedance	300 Ω balanced
FX Send Impedance	300 Ω pseudo-balanced

### Bluetooth and USB Information

Bluetooth Protocol	5.1
Bluetooth Function	Audio Streaming
USB	2x2, 3.1 ≥Gen1

### Electronic Crossover

Crossover Type	4th order Linkwitz-Riley set at 1.8 kHz
Crossover Frequency	1.8 kHz

### Equalization

Low	±15 dB @ 80 Hz
Mid	±15 dB @ 2.5 kHz
High	±15 dB @ 12 kHz

### Digital Effects

Number of Presets (FX1)	12
Number of Presets (FX2)	16

### Line Input Power

Detachable Line Cord	100–240V~, 50–60Hz, 75W
----------------------	-------------------------

### Safety Features

Input Protection	Peak and RMS limiting, power supply and amplifier thermal protection
Display LEDs	Front LEDs, Feedback Eliminator, Outdoor Mode, PA Mode, Bluetooth Status, Battery Level, Breakaway Mixer (Multiple)

## SHOWBOX SPECIFICATIONS CONTINUED...

### Battery Information

Battery Type	Lithium Ion
Battery Life	Up to 12 hours
Charge Time	3 hours (no signal), 4 hours (with signal)
Capacity	5200 mAh
Nominal Voltage	14.8 V
Operating Temperature Range	15 – 35 °C // 59 – 95 °F
Charging Temperature Range	0 – 45 °C // 32 – 113 °F

### Construction Features

Basic Design	Asymmetrical
Enclosure Material	Polypropylene
Enclosure Finish	Black, textured finish
Grille Material	Perforated Metal w/weather-resistant coating
Grille Finish	Powder-coated black
Handles	One on top

### Mounting Methods

Floor mount or pole mount via the built-in socket on the bottom of the cabinet [Be sure the pole is capable of supporting the weight of the ShowBox]. They are NOT designed to be suspended. The cabinet has no rigging points and is not suitable for rigging. Never attempt to suspend a ShowBox by its handle.

### Physical Properties (product)

Height:	19.7 in / 500 mm
Width:	11.8 in / 300 mm
Depth:	9.8 in / 249 mm
Weight:	20.9 lb / 9.5 kg

### Physical Properties (packaged product)

Height:	24.0 in / 610 mm
Width:	13.2 in / 335 mm
Depth:	11.8 in / 300 mm
Weight:	25.9 lb / 11.7 kg


### Options

ShowBox Backpack	P/N 2056473
GB-100 Rechargeable Battery	P/N 2053625
ShowBox Footswitch + Cable	P/N 2056472
T100 Tripod Stand	P/N 2052464
SPM200 Unthreaded Pole Mount	P/N 2035170
SPM400 Threaded Pole Mount	P/N 2051055

### Ordering Information


#### ShowBox Battery Powered All-In-One Performance Rig with Breakaway Mix Control

	P/N 2055123-00 (US)
	P/N 2055123-01 (EU)
	P/N 2055123-02 (JP)
	P/N 2055123-03 (UK)
	P/N 2055123-04 (AU)
	P/N 2055123-05 (CN)
	P/N 2055123-06 (BZ ~120V)
	P/N 2051300-07 (AR)
	P/N 2051300-08 (KR)
	P/N 2051300-09 (IN)

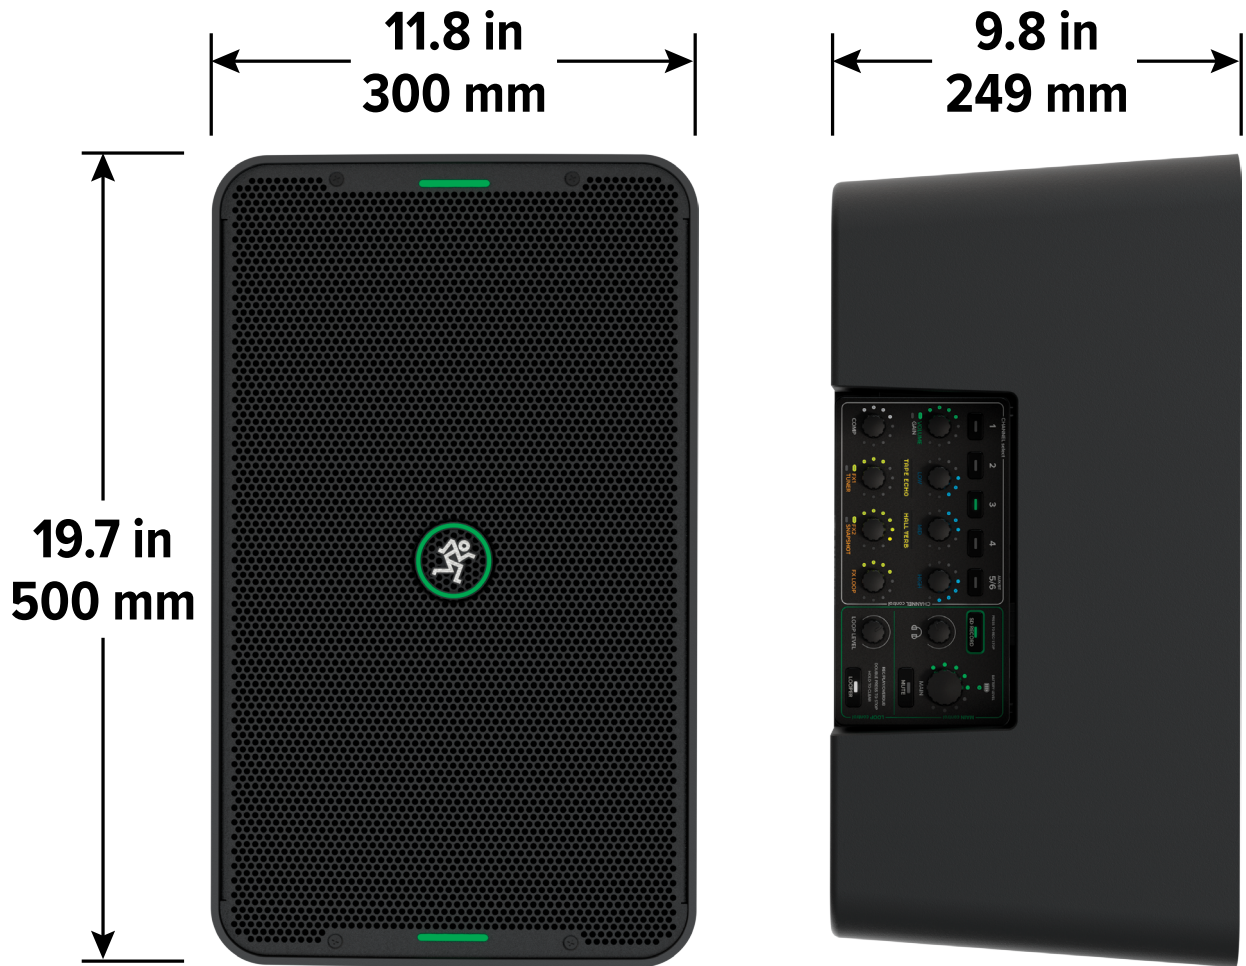**SHOWBOX DIMENSIONS**

**WEIGHT**  
20.9 lb / 9.5 kg

## SHOWBOX BLOCK DIAGRAM

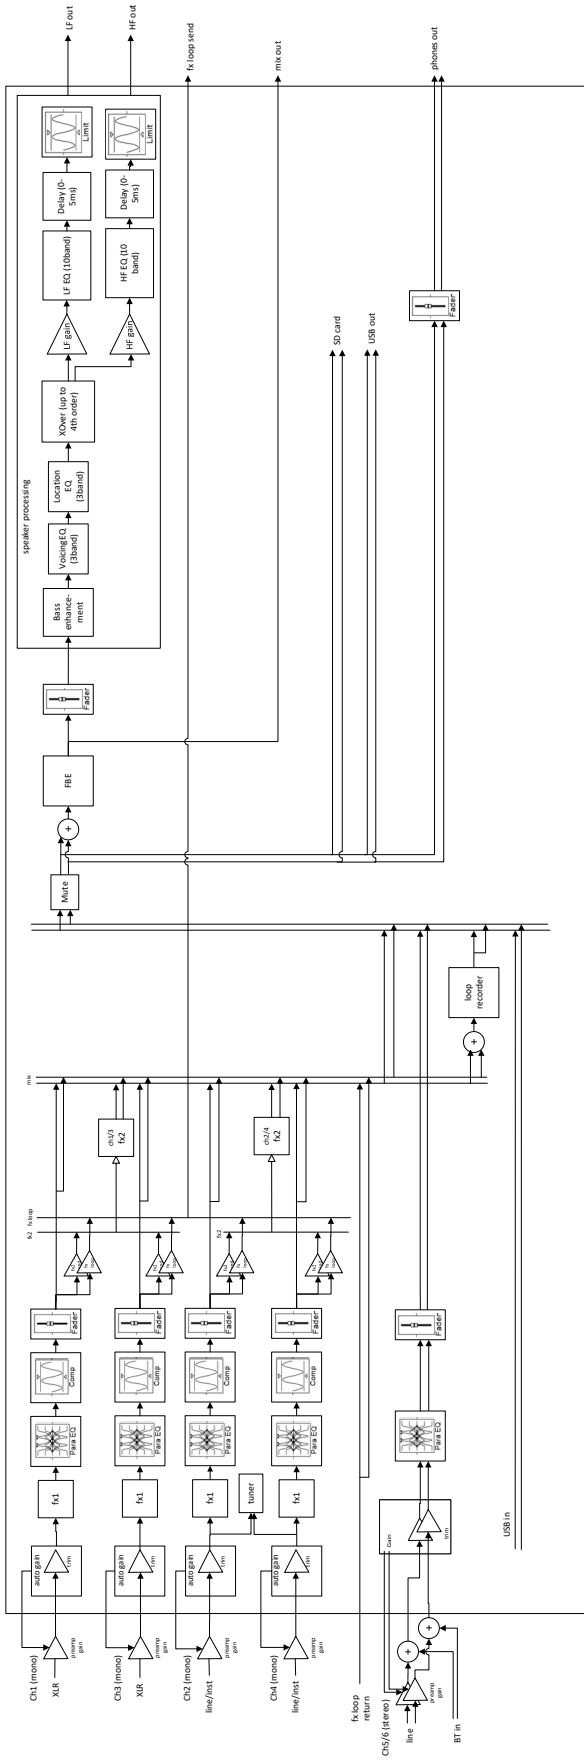

**SHOWBOX REAR PANEL**

## SHOWBOX BREAKAWAY MIXER



Electronic files for this product are available at:  
[www.mackie.com](http://www.mackie.com)

Specification Sheet

SHOWBOX\_SS.PDF

Owner's Manual

SHOWBOX\_OM.PDF



www.mackie.com  
 19820 North Creek Parkway #201  
 Bothell, WA 98011 USA  
 800-898-3211, Fax 425-487-4337

Part No. SW1435 Rev. B 06/24

LOUD Audio, LLC. is always striving to improve our products by incorporating new and improved materials, components, and manufacturing methods. Therefore, we reserve the right to change these specifications at any time without notice.

“Mackie” and the “Running Man” figure are registered trademarks of LOUD Audio, LLC. All other brands mentioned are trademarks or registered trademarks of their respective holders, and are hereby acknowledged.