# BEAMSPOT1-TRIAC NW

#### DESCRIPTION

This compact, stylish 15W WHITE 4500K projector is the perfect direct replacement for the old 30W PAR36 PINSPOT, no changes needed!

#### **FEATURES**

- This compact, stylish 15W WHITE projector is the perfect direct replacement for the old 30W PAR36 PINSPOT, no changes needed!
- NO DMX inside: can be dimmed using traditional TRIAC dimmers or with the dimmer knob on the back panel.
- Equipped with a very narrow 4° lens making it a very powerful tool for all kinds of applications. (perfect for to light up mirror balls !!!)
- Thanks to the included 10° & 45° filters this beauty can also be used for discotheques, exhibition booths, restaurants, shops, light up small objects, ...
- Available in two versions:
  - [NW]: Natural white 4500K color temperature with high CRIfactor (>90).
  - [WW]: Warm white 3200K color temperature with high CRIfactor (>90).
- Fixed mains power cord with standard mains plug (CEE 7/7) on the back panel.









www.briteq-lighting.com | https://www.facebook.com/Briteq

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2015 by BEGLEC NV. All rights reserved.

### SPECIFICATIONS

Commercial lighting, DJ & Club, **General: Application** 

Stage & Rental

General: Dimensions (cm) 17,2 x 15,6 x 12,5 cm

**General**: Weight (kg)

**General: Powerinput** AC 100 - 240V, 50/60Hz

**General: Energy Label** No **General: Power consumption W** 15 black **General: Color General: Display** none **General: Fixation** M10 General: IP rating indoor **Control: manual** Yes **Control: Master/Slave** No Control: DMX M/S No **Control: Standalone** fixed **Control: Type included remote Control: optional remote Control: programmable** No

**Control: upgradable software** No **Control: maximum DMX channels** 0 **Light: lamp socket** none

Light: Lux 1455 lux at 5m (angle 4°)

Manual

No

Light: lumen Light: lamp **LED Light: min. color temperature (K)** 4500 **Light: max. color temperature (K)** 4500 Light: CRI 90 Light: colors White **Light: mix colors** No Light: fixed gobos **Light: rotating gobos** Light: focus None

Light: iris Light : prism ( # facets + rotating


Light: zoom

y/n ) 4 Light: min. beam angle (°) Light: max. beam angle (°) 45 **Connections: input Connections: output** Connections: XLR 3 pin No **Connections: XLR 5 pin** No **Connections: Power Conn.** No **Connections: midi** No **Connections: usb** No **Connections: wifi** no **Connections: bluetooth** No **Connections: artnet** No **Connections: rdm** No

**Brand** BRITEQ **EANCode** 5420025649551

**Discontinued** No

LUX (full on)	36320			9080			4035			2270			1455	
BEAMSPOT1-TRIAC NW					0									
	V		5 1	RE	-	A R			1/6					
BEAM: 4°     DISTANCE (m) BEAM Ø (cm)		1 7		2 14		3 21			4 28				 5 35	

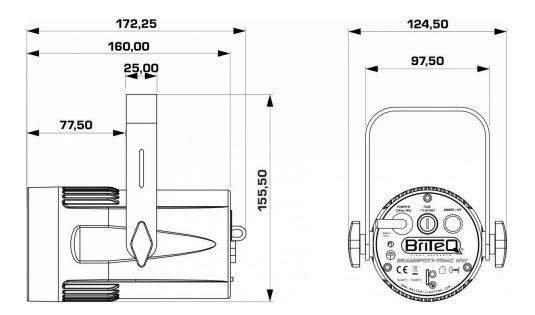

## YOUR DEALER



