# BT-THEATRE 50WW (WHITE)

#### DESCRIPTION

Stylish LED theater spot with manual  $10^{\circ} \sim 50^{\circ}$  zoom. 50watt LED, warm white 3200K with high (CRI >92) for natural colors.

#### **FEATURES**

- Stylish LED theater spot with manual 10° ~ 50° zoom.
- 50watt LED, warm white 3200K with high CRI-factor (>92) for
- Thanks to its attractive looks this projector is perfect for use in showrooms, shops, exhibition booths, rental, restaurants, museums,
- Color frame for use of color filters and four-leaf barndoor included
- No more heavy and expensive dimmer packs needed!
- Completely silent operation, no noisy cooling fan
- Extruded anodized aluminium housing with strong bracket, available in black and white color.
- LCD-display to select different working modes:
  - Standalone (master) Mode : set dimmer + strobe (if needed)
  - Master/slave mode: connect several projectors together, the first projector controls the others.
  - DMX-controlled: 4 different channel modes (8bit and 16bit dimming) for maximum flexibility.
- Selectable lamp behavior: halogen lamp (slow) or led (fast)
- Four dimmer curves: linear, square, inverse square, S-curve
- In case of DMX failure you can choose between blackout and freeze mode.
- RDM-functionality for easy remote setup: DMX addressing, channel mode. ...
- Lock function to avoid unwanted altering of the settings.
- Default factory settings + user settings can be saved/loaded.
- 3pin DMX in/outputs and fixed 1m power cord with standard mains plug (CEE 7/7)









www.briteq-lighting.com | https://www.facebook.com/Briteq

#### SPECIFICATIONS

General: Application

General: Dimensions (cm)

General: Weight (kg)

General: Powerinput

General: Energy Label

Architectural, Commercial lighting, Theatre

24,1 x 25,1 x 19,5 cm

3.63

AC 100 - 240V, 50/60Hz

General: Energy Label No
General: Power consumption W 50
General: Color white
General: Display LCD

**General: Fixation** optional standard clamp

General: IP rating indoor
Control: manual Yes
Control: Master/Slave Yes
Control: DMX M/S No
Control: Standalone fixed
Control: Type included remote
Control: optional remote
Control: programmable No

Control: programmable No
Control: upgradable software Yes
Control: maximum DMX channels 3
Light: lamp socket none

Light: Lux

330 lux at 5m and 10°, 77 lux at

5m and 40°

Light: lumen - COB
Light: min. color temperature (K) 3200
Light: max. color temperature (K) 3200
Light: CRI 92
Light: colors Warm white

Light: mix colors
No
Light: fixed gobos
Light: rotating gobos
Light: focus
None
Light: zoom
Manual
Light: iris
No

Light: prism ( # facets + rotating


y/n)


Light : frost filterNoLight : min. beam angle (°)10Light : max. beam angle (°)50


**Connections: input** 3 pin XLR, rdm **Connections: output** 3 pin XLR Connections: XLR 3 pin Yes **Connections: XLR 5 pin** No **Connections: Power Conn.** No **Connections: midi** No **Connections: usb** No **Connections: wifi** no **Connections: bluetooth** No **Connections: artnet** No **Connections: rdm** Yes **Brand** BRITEQ


**EANCode** 5420025660143

**Discontinued** No





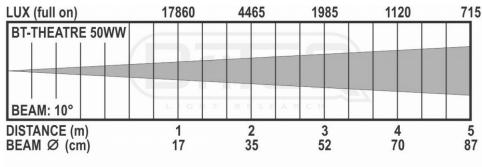

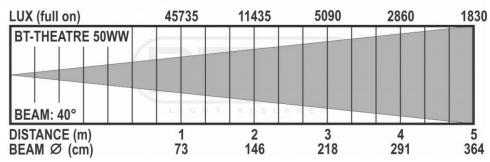

### YOUR DEALER



## www.briteq-lighting.com | https://www.facebook.com/Briteq