LDP-COLORSTRIP 12FC

DESCRIPTION

Powerful indoor LED projector equipped for typical "wall wash" applications. 48cm long enclosure, equipped with 12pcs 4W RGBW-leds, divided into 2 sections.

FEATURES

- Powerful indoor LED projector equipped for typical "wall wash" applications.
- Fully compatible with the IP65 outdoor LDP-POWERBAR
- Excellent light output and perfect color mixing thanks to 4Watt RGBW LEDs and high quality optics.
- 48cm long enclosure, equipped with 12 leds, divided into 2 sections.
- Elegant, extruded aluminum housing.
- The discretely designed bracket can be easily adjusted in any position.
- The included barndoor hides the LEDs and thus reduces unwanted glare.
- Optimal thermal management for long lifespan and easy maintenance
- Internal power supply and DMX / LED-driver electronics for easy installation.
- IEC-C13/C14 and XLR-3pin input / output connectors allow to link up to 32pcs of LDP-COLORSTRIP 12FC.
- Perfect for use in hotels, clubs, shops, homes, ...
- Excellent built-in programs for wonderful, ever changing, light shows.
- Completely silent operation, thanks to natural convection cooling system.
- Alphanumeric OLED-display and backlit touch keys to select different options of the setup menu.
- Works in standalone, master/slave or can be selected by DMX: fading colors, static colors / chases
- Both models can be daisy chained and used together in master/slave
- Full DMX control with different channel modes: from 3ch up to 10ch (2 sections)
- Adaptable lamp behavior thanks to seamless dimmer speed control.
- Four dimmer curves: linear, square, inverse square, S-curve
- In case of DMX failure, you can choose between blackout and freeze mode.
- Lock function to avoid unwanted altering of the settings.









www.briteq-lighting.com | https://www.facebook.com/Briteq

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2018 by BEGLEC NV. All rights reserved.



General : Application Architectural

General : Dimensions (cm) $47.9 \times 5.6 \times 10.1(12.2)$

General: Weight (kg) 2.33

General : Powerinput AC 100 - 240V, 50/60Hz

General: Energy Label Νo **General: Power consumption W** 56 **General: Color** white **General: Display OLED General: Fixation** M10 **General: IP rating** indoor **Control: manual** Yes Control: Master/Slave Yes **Control: SMART-DMX** Yes


Control: Standalone automatic, fixed

Control: programmable Νo **Control: upgradable software** Yes **Control: maximum DMX** 10 channels **Light: lamp socket** none Light: lamp LED Light: colors **RGBW Light: mix colors** Yes Light: iris Νo **Light:** frost filter No **Light**: min. beam angle (°) 15 Light: max. beam angle (°) 34 Light: min. refresh rate (kHz) No **Light**: max. refresh rate (kHz) Νo

Connections: input
Connections: output
3 pin XLR, IEC, rdm
3 pin XLR, IEC, rdm

Brand BRITEQ
EA NCode 5420025651431

Discontinued No

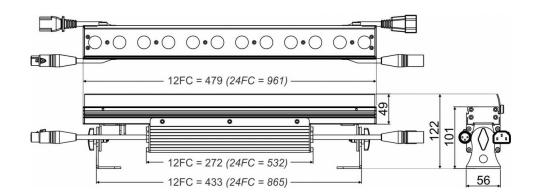

YOUR DEALER



www.briteq-lighting.com | https://www.facebook.com/Briteq