

POWERMATRIX5x5- RGB MK2


04412

DESCRIPTION

This powerful 5x5 Matrix effect projector turns even the biggest concerts and TV shows into an amazing spectacle! Light engineers will be amazed by the endless possibilities and ease of use to create astonishing light shows!

FEATURES

- This powerful 5x5 Matrix effect projector turns even the biggest concerts and TV shows into an amazing spectacle! Light engineers will be amazed by the endless possibilities and ease of use to create astonishing light shows!
- **Equipped with Ethernet in/out and full support for Art-Net protocol!**
- **Internal Art-Net node: "Art-Net to DMX-conversion" 1 DMX-universe is available on the DMX-output.**
- Each projector is equipped with a 5x5 matrix containing 25pcs 30W COB RGB-leds.
- A vast internal RGB-effects library, containing letters, numbers, chases: controllable by 6 FX-channels!
- Many different DMX channel modes for different applications: 4, 5, 6, 11, 25, 75, 81, 100, 106, 125 & 131ch
- Excellent built-in programs for wonderful, ever changing, light shows.
- RDM-functionality for easy remote setup: DMX addressing, channel mode, ...
- Excellent RGB color mixing and dimming down to 0% for each of the 25 individually controllable pixels
- Very high 1200Hz LED refresh rate for flicker free used in TV-studios.
- Silent operation, thanks to the temperature controlled "low airstream" cooling system.
- Shows work in standalone, master/slave or can be selected by DMX: static colors, fading colors, different static chases, different sound activated chases.
- Backlit alphanumeric 2x 16character LCD-display for easy menu navigation
- Adjustable master dimmer for all standalone functions.
- Selectable lamp behavior: halogen lamp (slow) or led (fast)
- Four dimmer curves: linear, square, inverse square, S-curve
- In case of DMX failure you can choose between blackout and freeze mode.
- Lock function to avoid unwanted altering of the settings.
- Individual white balance for each pixel to perfectly match the colors of several projectors.
- Default factory settings + 2 user settings can be saved/loaded.
- Neutrik PowerCON in/outputs.
- Both 3pin & 5pin DMX in/outputs.
- Rugged metal construction, equipped with "coffin lock" mechanisms to build large matrix arrays in no time.
- Including a multifunctional bracket, designed for both floor and truss mounting.
- Optionally hanging bracket available (order code: 4407)
- High efficiency and low power consumption!

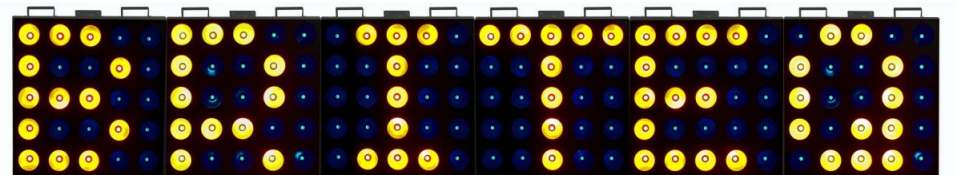


www.briteq-lighting.com | <https://www.facebook.com/Briteq>

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2015 by BEGLEC NV. All rights reserved.



SPECIFICATIONS

General : Application	DJ & Club, Stage & Rental, Theatre
General : Dimensions (cm)	55 x 55 x 12 cm
General : Weight (kg)	14.5
General : Powerinput	AC 100 - 240V, 50/60Hz
General : Energy Label	No
General : Power consumption W	750
General : Color	black
General : Display	LCD
General : Fixation	optional standard clamp
General : IP rating	indoor
Control : manual	No
Control : Master/Slave	Yes
Control : DMX M/S	No
Control : Standalone	automatic, sound, fixed
Control : Type included remote	-
Control : optional remote	-
Control : programmable	No
Control : upgradable software	Yes
Control : maximum DMX channels	131
Light : lamp socket	none
Light : Lux	-
Light : lumen	-
Light : lamp	COB
Light : min. color temperature (K)	-
Light : max. color temperature (K)	-
Light : CRI	-
Light : colors	Red, Green, Blue, White, Amber, other
Light : mix colors	Yes
Light : fixed gobos	-
Light : rotating gobos	-
Light : focus	None
Light : zoom	None
Light : iris	No
Light : prism (# facets + rotating y/n)	-
Light : min. beam angle (°)	60
Light : max. beam angle (°)	60
Light : min. refresh rate (kHz)	1.2
Light : max. refresh rate (kHz)	1.2
Connections : input	3 pin XLR, 5 pin XLR, powercon, artnet, rdm
Connections : output	3 pin XLR, 5 pin XLR, powercon, artnet
Brand	BRITEQ
EANCode	5420025644129
Discontinued	No

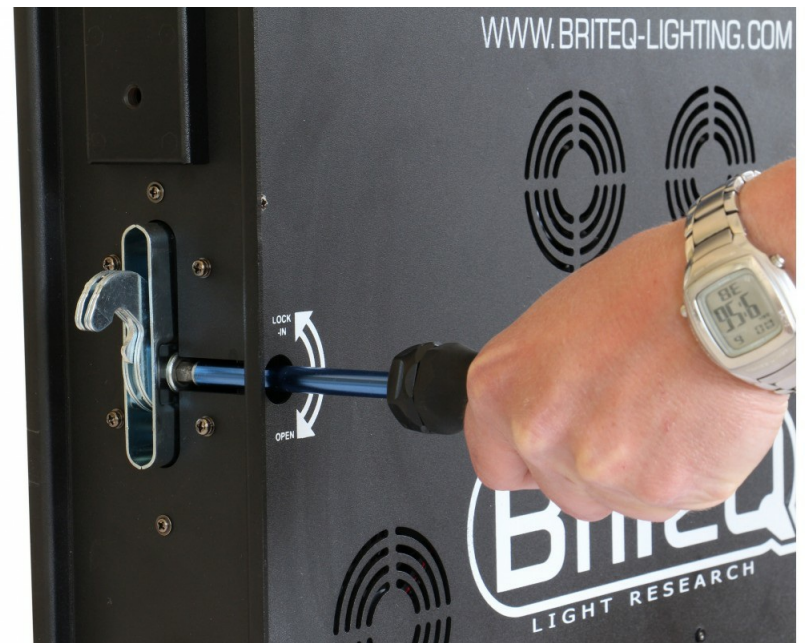

YOUR DEALER



www.briteq-lighting.com | <https://www.facebook.com/Briteq>

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2015 by BEGLEC NV. All rights reserved.